

FEATURES

- Adjusts Standard *Rejutors*
- Labview based *Rejust-it* software
- Microbridge patented *Rejutor* algorithm
- Plug-and-Play USB interface
- Co-adjustment of two *Rejutors* in dual or divider configuration
- Able to adjust 1KΩ to 100KΩ *Rejutors*

APPLICATIONS

- Precise adjustment of Microbridge Technologies MBD family of *Rejutors*
- Single *Rejutor* resistance adjustment
- Stand-alone bridge resistance adjustment
- Functional in-circuit adjustment
 - Differential voltage adjustment mode
 - Target voltage adjustment mode

KIT CONTENTS

- MBK-408A *Rejutor* Calibration Tool
- Transformer (Multi-region 18VDC)
- Entry-Level *Rejust-it* Software (on CD)
- User Manual (on CD)
- 26-Pin Mating Connector
- USB Interface Cable
- Self-test Connector

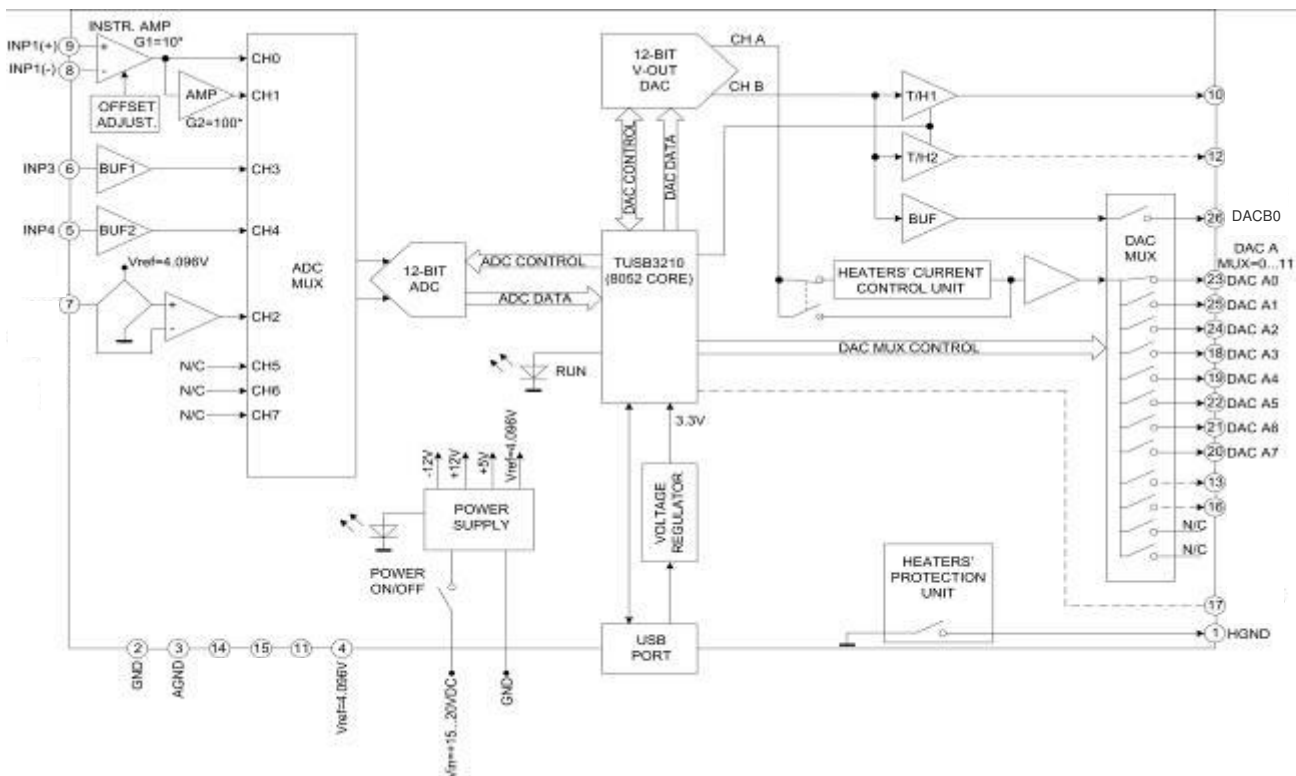
FUNCTIONAL BLOCK DIAGRAM


Figure 1: Functional Block Diagram

Information furnished by Microbridge Technologies is believed to be accurate and reliable. However, no responsibility is assumed by Microbridge Technologies for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Microbridge Technologies. Trademarks and registered trademarks are the property of their respective companies.

GENERAL OVERVIEW

The Microbridge Technologies MBK-408A Rejistor Calibration Kit provides the interface between *Rejutors* and *Rejst-it* software. The kit measures the dependent variable (voltage) using a 12-bit ADC and adjusts the *Rejistor*(s) with 12-bit DAC under user control. The basic kit provides the tools to start in-circuit *Rejistor* adjustment.

The *Rejst-it* Graphical User Interface (GUI) provides an editor for user-specific applications:

- Connection configuration for ADC, DAC
- Type of *Rejistor*
- Descriptions of (monotonic) variation of circuit output as a function of resistance, for each *Rejistor*

MBK-408A Functionality

Hardware	Software	Functionality
12-bit A-to-D Converters	±10 V Full Scale, 5 mV per bit	Measure circuit outputs
Differential, Instrument Grade Amplifier (IN+ - IN-)	48x Gain → CH0: U1	Coarse Differential Measurements
	576x Gain → CH1: U2	Fine Differential Measurements
2 Single-Ended Analog Inputs, ±10 V Max	CH3: U3	Target Value Measurements
	CH4: U4, 4x Gain	
12-bit D-to-A Converter	4.096 V Full Scale, 1 mV per bit	Drive pulse stream to program <i>Rejutors</i>
9 Analog Heater Outputs 3 x Gain	DACA0	Output connections to <i>Rejistor</i> Auxiliary pins
	DACA1	
	DACA2	
	DACA3	
	DACA4	
	DACA5	
	DACA6	
	DACA7	
	DACB0	High-current output driver
Plug-and-Play USB Interface	Interface to Host Computer	Control MBK-408A <i>Rejistor</i> Calibration Tool

PIN FUNCTIONAL DESCRIPTION

26-Pin D-Sub Male *Rejistor* Interface Connector

Pin	Pin Name	Direction	Function	Notes
1	HGND	Output	Ground for Heater Voltage	Contains in-circuit fault protection
2	GND	Output	Digital Ground (must be connected to local ground)	
3	AGND	Output	Analog Ground (reference for A-to-D Converters)	
4	NC1	-	No connect	
5	INP4	Input	Analog input #4	Single-ended input ±10V max, 4x Gain
6	INP3	Input	Analog input #3	Single-ended input ±10V max
7	NC2	-	No connect	
8	INP1-	Input	Analog input #1	Differential Pair – inverted I/P, ±10V max
9	INP1+	Input	Analog input #0	
10	NC3	-	No connect	
11	NC4	-	No connect	
12	NC5	-	No connect	
13	NC6	-	No connect	
14	NC7	-	No connect	
15	NC8	-	No connect	
16	NC9	-	No connect	
17	NC10	-	No connect	
18	A3	Output	Analog Output #3	12V, 20mA Max.
19	A4	Output	Analog Output #4	12V, 20mA Max.
20	A7	Output	Analog Output #7	12V, 20mA Max.
21	A6	Output	Analog Output #6	12V, 20mA Max.
22	A5	Output	Analog Output #5	12V, 20mA Max.
23	A0	Output	Analog Output #0	12V, 20mA Max.
24	A2	Output	Analog Output #3	12V, 20mA Max.
25	A1	Output	Analog Output #1	12V, 20mA Max.
26	B0	Output	Analog Output #12	12V, 200mA Max.

MINIMUM CONFIGURATION

Rejust-it executable software runs on Windows XP. A self-configuring USB port is required to communicate between the host computer and the MBK-408A.

REJUSTOR CALIBRATION CAPABILITY

The MBK-408-Axx Rejustor Calibration Kit is controlled using *Rejust-it* executable code on the host computer.

In-Circuit Calibration

The MBK-408A can be connected to the application circuit for in-circuit calibration. The two modes, below, allow adjustment of the *Rejustor(s)* to meet a target output requirement. The target output (voltage, current, frequency, etc) must be converted to a voltage to be measured by the analog inputs on the MBK-408A. *Rejust-it* software adjusts the *Rejustor* for a specific application where the transfer function between the value of the *Rejustor* and the output is known. *Rejustors* can be adjusted to generate a target voltage, or to a differential voltage.

Target Voltage Calibration Mode

Target value calibration provides the capability to adjust a *Rejustor* to achieve a target output voltage. This mode can be used to calibrate voltage references, voltage regulators or other devices with a target value. For example an LM235 precision temperature sensor can be calibrated to 2.9315V at room temperature. Target voltage calibration can be used with single or dual discrete *Rejustors* or divider *Rejustors* (MBD family).


Differential Voltage Calibration Mode

Differential voltage is used to null an offset and requires a reference input voltage. This function uses the differential inputs on the Calibration Tool (Pins 8 and 9) to adjust the *Rejustors* to reduce an offset or balance a bridge to zero. Differential voltage calibration can be used with single or dual discrete *Rejustors* or divider *Rejustors* (MBD family).

Custom Software Interface

MBK-408-Axx customized development tools and software solutions can be configured by Microbridge for custom applications. Contact Microbridge Technologies Inc., for more information.

PRODUCT DESIGNATION

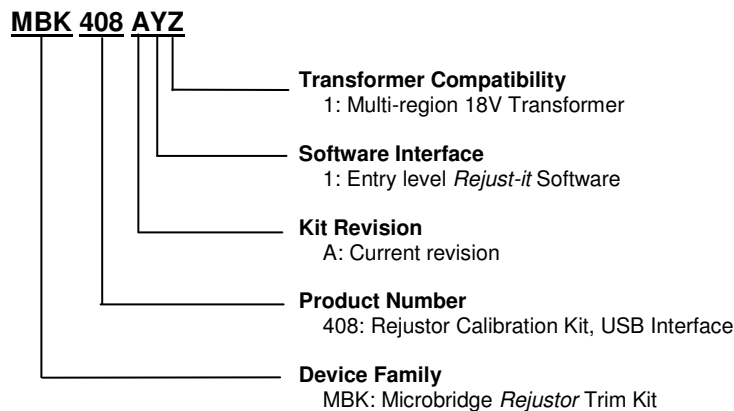

™ *Rejustor* is a registered trademark of Microbridge Technologies Inc.
 ™ Labview is a registered trademark of National Instruments Corporation
 ™ Windows, Windows 2000 and Windows XP are registered trademarks of Microsoft Corporation